

UPPER DOORS OPEN BY  
UNLATCHING IN LOWER  
COMPARTMENT AND CAN  
BE CLOSED INDEPENDENTLY  
THREE LOUVERS EA.  
TOP DOOR

ALUMINUM NO. PLATE


SIX LOUVERS @ TOP  
& BOTTOM EA. DOOR

TWO SGL. PRONG WALL  
HOOKS PER OPENING


LOCK HOLE COVER PL.

STAINLESS RECESSED  
POCKET W/ PADLOCK  
EYE

16GA. FRAME W/ 18GA.  
DOORS

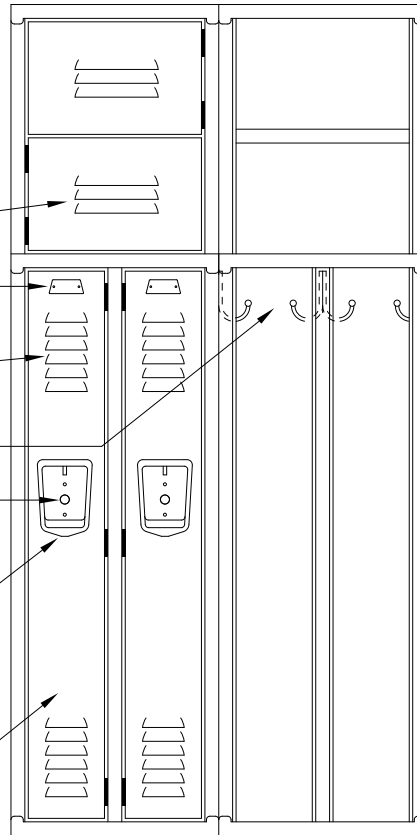

ELEVATION

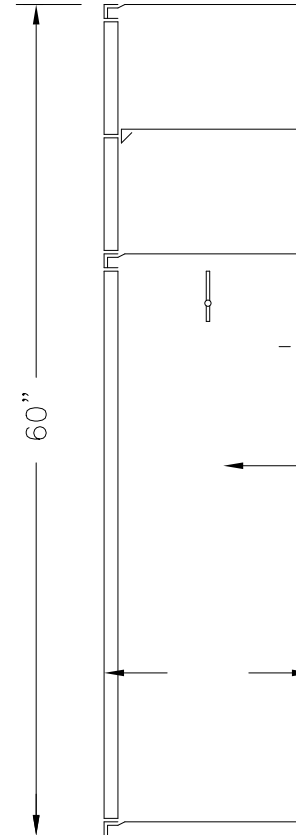

24GA. BODY &  
TIER HEADS

SECTION @ WALL

60" HIGH TWO PERSON VANGUARD KNOCKDOWN LOCKER W/ RECESSED POCKET

TYPICAL FOR 15" & 18" WIDE, ALLOW 1/16" CREEPAGE PER FRAME  
TYPICAL FOR 12" & 15" DEEP

This drawing shows a standard Penco Product. Any modifications  
to the product must be approved by Penco Engineering. 8/6/2001



151560V2P.dwg

UPPER DOORS OPEN BY  
UNLATCHING IN LOWER  
COMPARTMENT AND CAN  
BE CLOSED INDEPENDENTLY  
THREE LOUVERS EA.  
TOP DOOR

ALUMINUM NO. PLATE


SIX LOUVERS @ TOP  
& BOTTOM EA. DOOR

TWO SGL. PRONG WALL  
HOOKS EA. OPENING


LOCK HOLE COVER PL.

STAINLESS RECESSED  
POCKET W/ PADLOCK  
EYE

16GA. FRAME W/ 18GA.  
DOORS

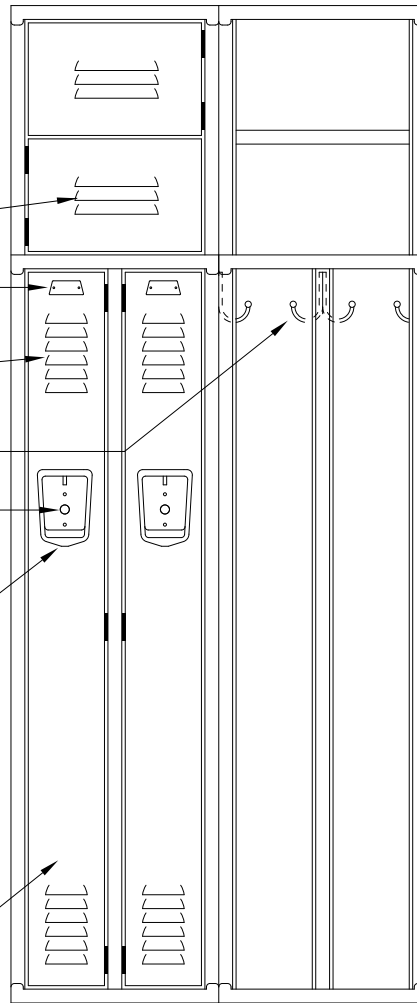

ELEVATION

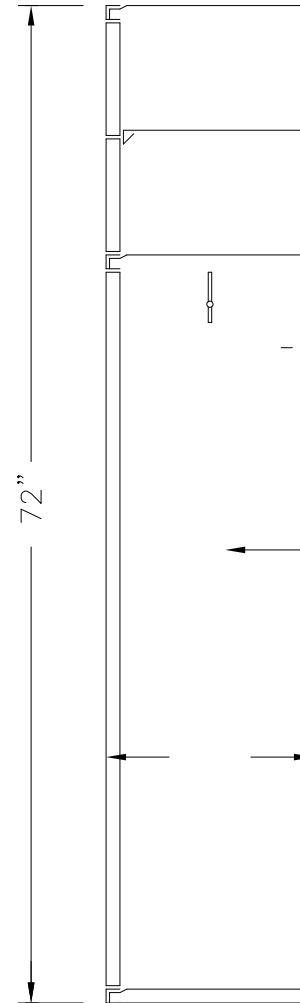

72"

24GA. BODY &  
TIER HEADS

SECTION @ WALL

72" TWO PERSON VANGUARD KNOCKDOWN LOCKER W/ RECESSED POCKET

TYPICAL FOR 15" & 18" WIDE, ALLOW 1/16" CREEPAGE PER FRAME  
TYPICAL FOR 12" & 15" DEEP

This drawing shows a standard Penco Product. Any modifications  
to the product must be approved by Penco Engineering. 8/6/2001



151572V2P.dwg

UPPER DOORS OPEN BY  
UNLATCHING IN LOWER  
COMPARTMENT AND CAN  
BE CLOSED INDEPENDENTLY

THREE LOUVERS EA.  
TOP DOOR

ALUMINUM NO. PLATE


SIX LOUVERS @ TOP  
& BOTTOM EA. DOOR

ONE COAT ROD &  
TWO SGL. PRONG WALL  
HOOKS EA. OPENING


LOCK HOLE COVER PL.

STAINLESS RECESSED  
POCKET W/ PADLOCK  
EYE

16GA. FRAME W/ 18GA.  
DOORS

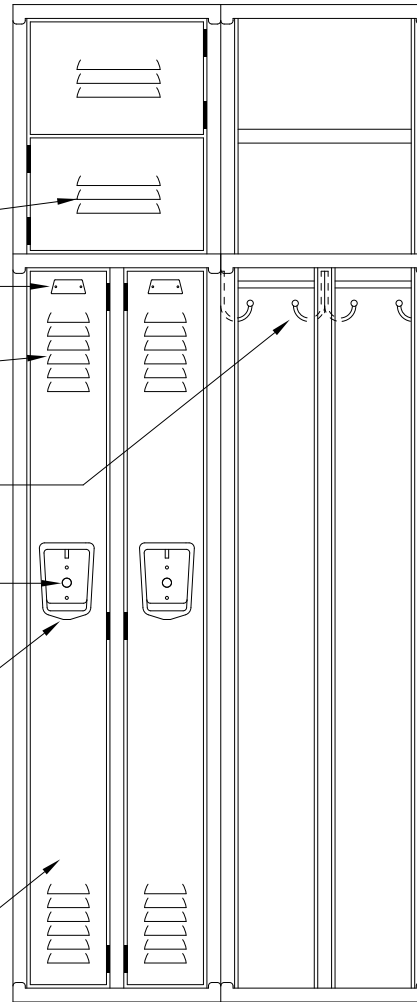

ELEVATION

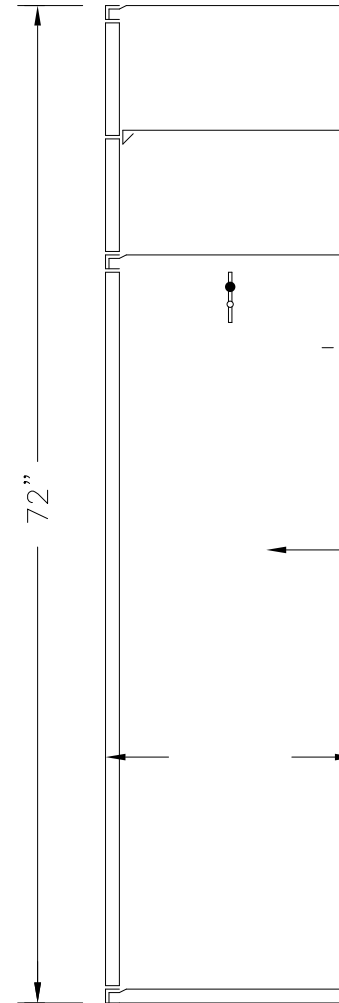

24GA. BODY &  
TIER HEADS

SECTION @ WALL

72" HIGH TWO PERSON VANGUARD KNOCKDOWN LOCKER W/ RECESSED POCKET

TYPICAL FOR 15" & 18" WIDE, ALLOW 1/16" CREEPAGE PER FRAME  
TYPICAL FOR 18" & 21" DEEP

This drawing shows a standard Penco Product. Any modifications  
to the product must be approved by Penco Engineering. 8/6/2001



151872V2P.dwg

ALUMINUM NO. PLATE


SIX LOUVERS @ TOP  
& BOTTOM EA. DOOR

THREE SGL. PRONG WALL  
HOOKS EA. OPENING


LOCK HOLE COVER PLATE

STAINLESS STEEL  
RECESSED POCKET  
WITH PADLOCK EYE

16GA. FRAME W/ 18GA.  
DOORS

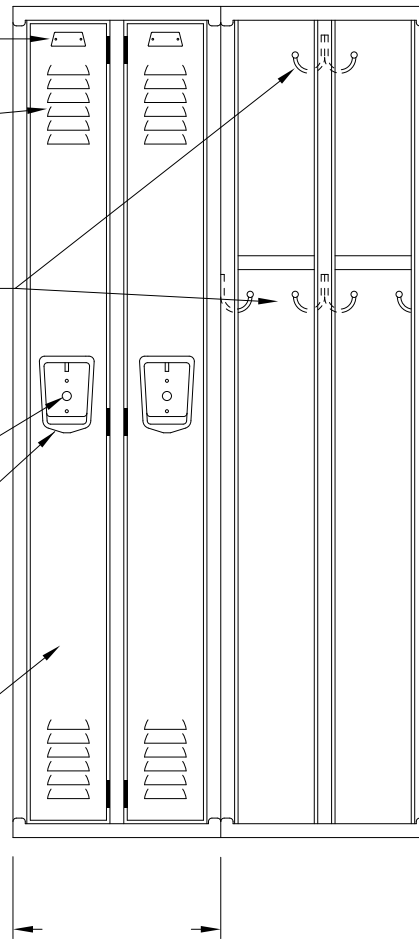

ELEVATION

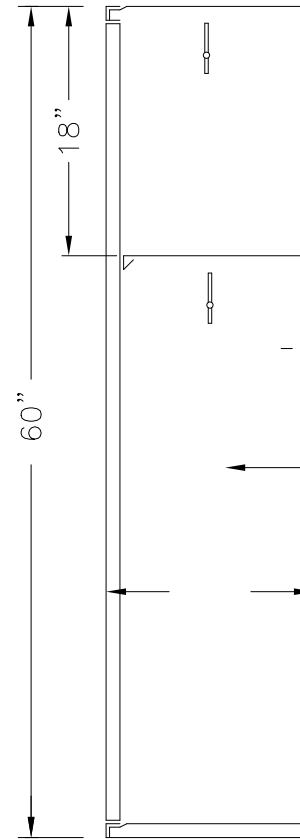

24GA. BODY &  
TIER HEADS

SECTION @ WALL

60" DUPLEX VANGUARD KNOCKDOWN LOCKER W/ RECESSED POCKET

TYPICAL FOR 15" & 18" WIDE, ALLOW 1/16" CREEPAGE PER FRAME  
15" DEEP

This drawing shows a standard Penco Product. Any modifications to the product must be approved by Penco Engineering. 8/6/2001




151560RDX.dwg

ALUMINUM NO. PLATE  
 SIX LOUVERS @ TOP  
 & BOTTOM EA. DOOR


THREE SGL. PRONG WALL  
 HOOKS EA. OPENING

LOCK HOLE COVER PLATE  
 STAINLESS STEEL  
 RECESSED POCKET  
 WITH PADLOCK EYE

16GA. FRAME W/ 18GA.  
 DOORS

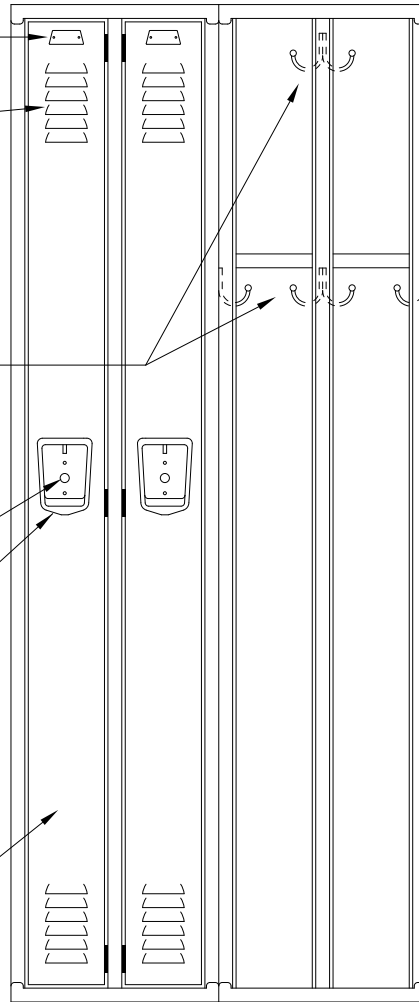

ELEVATION

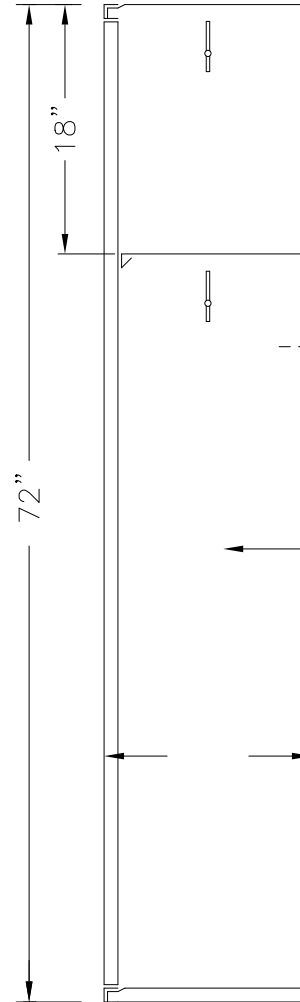

SECTION @ WALL

24GA. BODY &  
 TIER HEADS

72" DUPLEX VANGUARD KNOCKDOWN LOCKER W/ RECESSED POCKET

15" WIDE, ALLOW 1/16" CREEPAGE PER FRAME  
15" DEEP

This drawing shows a standard Penco Product. Any modifications to the product must be approved by Penco Engineering. 8/6/2001



ALUMINUM NO. PLATE


SIX LOUVERS @ TOP  
& BOTTOM EA. DOOR

ONE COAT ROD &  
THREE SGL. PRONG WALL  
HOOKS EA. OPENING


LOCK HOLE COVER PLATE

STAINLESS STEEL  
RECESSED POCKET  
WITH PADLOCK EYE

16GA. FRAME W/ 18GA.  
DOORS

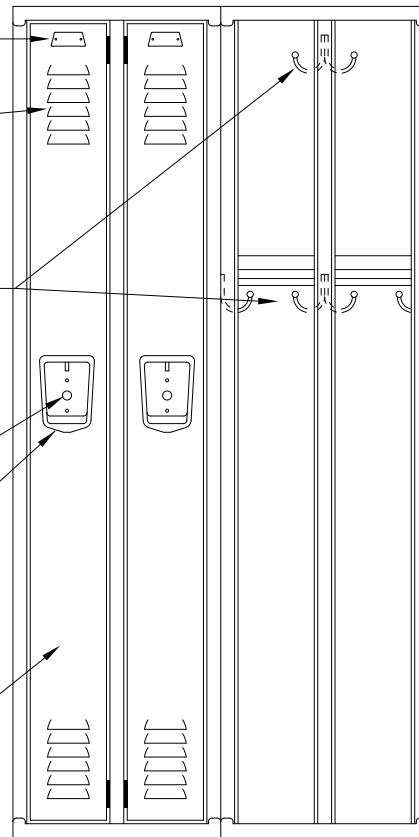

ELEVATION

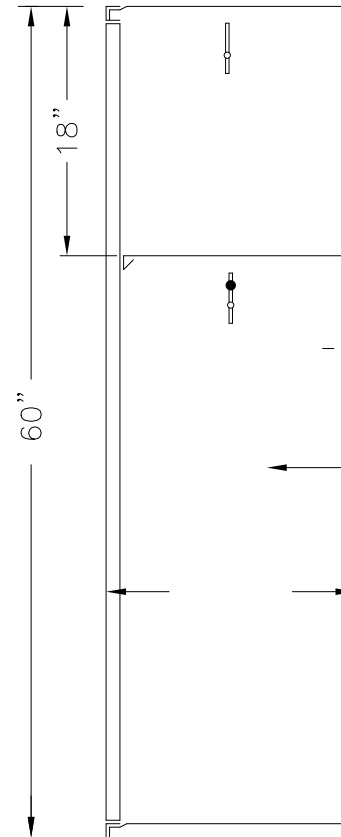

24GA. BODY &  
TIER HEADS

SECTION @ WALL

60" DUPLEX VANGUARD KNOCKDOWN LOCKER W/ RECESSED POCKET

TYPICAL FOR 15" & 18" WIDE, ALLOW 1/16" CREEPAGE PER FRAME  
TYPICAL FOR 18" & 21" DEEP

This drawing shows a standard Penco Product. Any modifications to the product must be approved by Penco Engineering. 8/6/2001



151860RDX.dwg

ALUMINUM NO. PLATE


SIX LOUVERS @ TOP  
& BOTTOM EA. DOOR

ONE COAT ROD &  
THREE SGL. PRONG WALL  
HOOKS EA. OPENING


LOCK HOLE COVER PLATE

STAINLESS STEEL  
RECESSED POCKET  
WITH PADLOCK EYE

16GA. FRAME W/  
18GA. DOORS

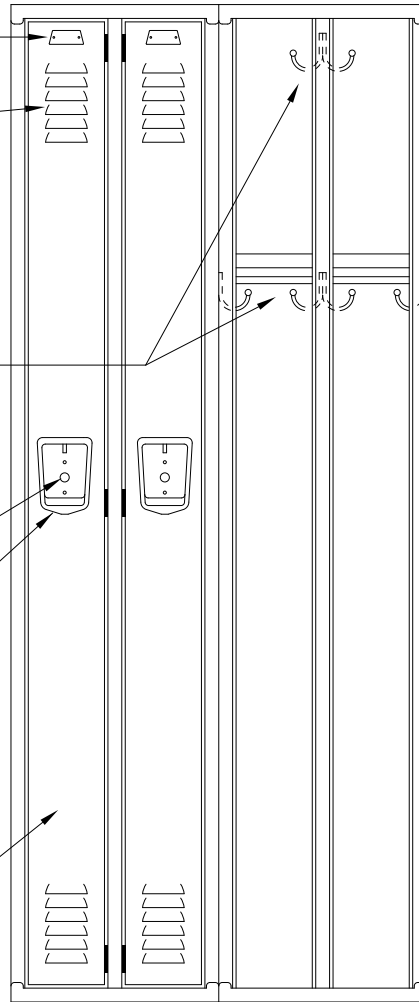

ELEVATION

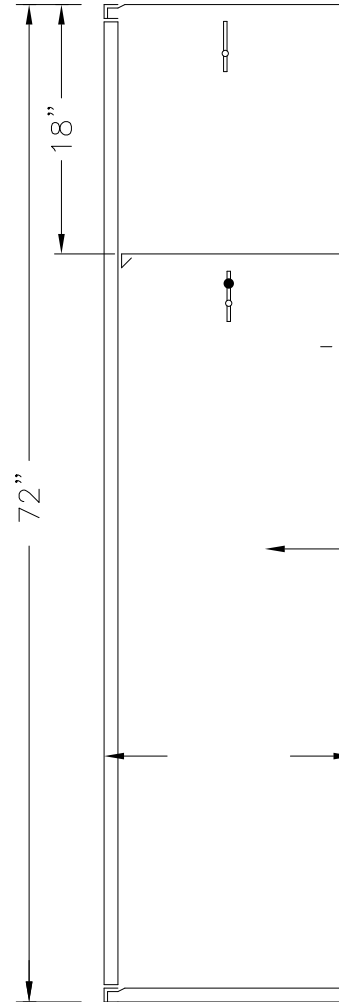

SECTION @ WALL

24GA. BODY &  
TIER HEADS

72" DUPLEX VANGUARD KNOCKDOWN LOCKER W/ RECESSED POCKET

TYPICAL 15" & 18" WIDE, ALLOW 1/16" CREEPAGE PER FRAME  
18" & 21" DEEP

This drawing shows a standard Penco Product. Any modifications to the product must be approved by Penco Engineering. 8/6/2001

